CREE LIGHTING

THE EDGE®

Back Light Shield Kit - 90° or 270° Optics

Includes: XA-9017& (Bronze),XA-9018& (Silver), XA-9019& (White), XA-9031& (Black), XA-9337& (Plantium Bronze)

INSTALLATION INSTRUCTIONS INSTRUCTIONS D'INSTALLATION

IMPORTANT SAFEGUARDS

When using electrical equipment, basic safety precautions should always be followed including the following:

READ AND FOLLOW ALL SAFETY INSTRUCTIONS

- DANGER- Risk of shock- Disconnect power before installation.

 PANCER Risk of shock- Disconnect power before installation.


 Council Vision of the part of the
 - DANGER Risque de choc Couper l'alimentation avant l'installation.
- 2. This accessory intended to be used with THE EDGE luminaires with LEDs/optics oriented at 90° or 270°.


SAVE THESE INSTRUCTIONS FOR FUTURE REFERENCE

ACCESSORY KIT CONTENTS

1. (1) Back Light Shield for 20 LEDs

TO INSTALL:

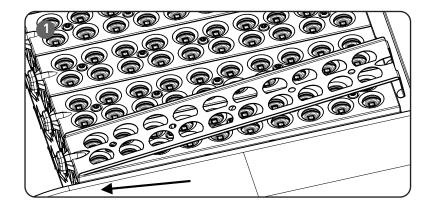

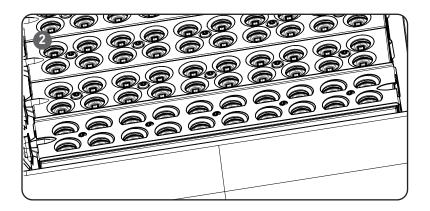

BACK LIGHT SHIELD

NOTE: The Back Light Shield can be mounted 90° or 270° on THE EDGE luminaires.

STEP 1:

Clean the surface of the Light Bars.

NOTE: Be sure to use a very mild detergent.

Damage will occur to the LED Optics if any alcohol based or otherwise harsh chemicals used.

STEP 2.

Orientate the Back Light Shield to face 90° or 270°, depending on the fixture, and carefully place on the surface of the Light Bars over the LEDs having the tabs going over one end of the Light Bar. See **Figure 1.**

STEP 3:

Gently pull the tabs on the opposite end of the Back Light Shield over the Light Bar and carefully press down until it clicks and is flushed. See

Figure 2.

STEP 4:

Repeat Steps 2 and 3 depending on the number of LEDs.