

C-WP-C-TR-SCCT Series

Traditional-Style LED Wall Pack | Wattage and Color Temperature Selectable
w/ Integrated Emergency Battery Backup Option

Replaces up to 400W MH



THREE WALL PACKS IN ONE

Our C-Lite Traditional-Style LED Wall Pack delivers up to 14,400 lumens. Select between four different wattages on each model and also choose your desired color temp (3000K, 4000K, or 5000K). Each model is shipped with the default setting at the highest wattage and at 4000K. Integrated battery backup option available.



PRODUCT SPECIFICATIONS

OVERVIEW

- Max. Delivered Lumens: Up to 6500 Lumens (**S6L**), Up to 10,200 Lumens (**S10L**), Up to 14,400 Lumens (**S14L**)
- CRI: ≥ 70
- SCCT: Selectable 3000K, 4000K or 5000K
- Input Power: Up to 46W (**S6L**), Up to 71W (**S10L**), Up to 100W (**S14L**)
- Estimated L70 Lifetime @ 25°C: > 50,000 Hours
- Power Factor: > 0.9
- Total Harmonic Distortion: <20%
- Limited Warranty: 5-Year*
- Replaces: 150W PSMH (**S6L**), 250W PSMH (**S10L**), 400W MH (**S14L**)

FEATURES	RECOMMENDED USE	INPUT VOLTAGE
<ul style="list-style-type: none"> • Select your CCT with choices of 3000K, 4000K or 5000K • (S6L): 46W unit has wattage options of 46W (6500L), 42W (6250L), 30W (4470L) or 16W (2380L) • (S10L): 71W unit has wattage options of 71W (10,200L), 61W (9090L), 41W (6110L) or 21W (3130L) • (S14L): 100W unit has wattage options of 100W (14,400L), 92W (13,800L) 62W (9300L) or 32W (4800L) • FCC Part 15, Subpart B, Class A limits for conducted and radiated emissions 	<ul style="list-style-type: none"> • Commercial • Entryways • Perimeter Lighting • Security 	<ul style="list-style-type: none"> • Universal (120V - 277V)

CERTIFICATIONS:



*See Warranty & Certifications on pg. 3

CA RESIDENTS WARNING: Cancer and Reproductive Harm –
www.p65warnings.ca.gov


C-WP-C-TR-SCCT Series

ORDERING INFORMATION

Example SKU: C-WP-C-TR-S6L-SCCT-UL-DB-EM

C-WP	C	TR		SCCT	UL	DB	
PRODUCT	SERIES	STYLE	LUMEN PACKAGE	SCCT	VOLTAGE	HOUSING COLOR	INTEGRATED EMERGENCY BATTERY BACKUP OPTION
C-WP	C	TR Traditional-Style	S14L Up to 14,400 Lumens S10L Up to 10,200 Lumens S6L Up to 6500 Lumens	SCCT Warm White (3000K) Neutral White (4000K*) Cool White (5000K)	UL Universal (120-277V)	DB Dark Bronze	[BLANK] w/out Emergency Battery Backup EM w/ Emergency Battery Backup - 8W Battery - Provides 90 minutes of emergency operation - 1100 lumens in emergency mode

*Default settings at time of shipping are highest product wattage and 4000K.

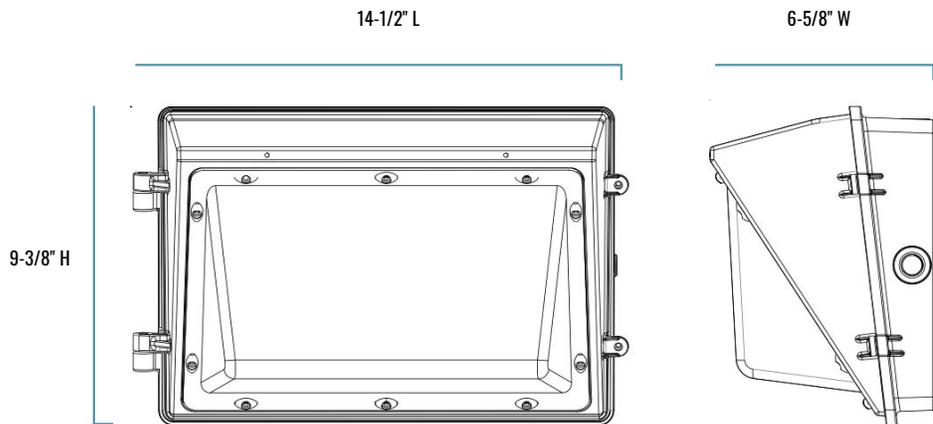

SERIES OVERVIEW

DIMENSIONS	PRODUCT WEIGHT	MOUNTING HEIGHT	SPACING
14-1/2" L x 6-5/8" W x 9-3/8" H	5.86 lbs. (6L), 6.15 lbs. (10L), 6.23 lbs. (14L), 5.93 lbs. (6L-EM), 6.22 lbs. (10L-EM), 6.31 lbs. (14L-EM)	8 to 20 feet (6L) & 12 to 25 feet (10L & 14L)	3 to 4 times the mounting height

FIXTURE SPECIFICATIONS

HOUSING	UV-stabilized dark bronze powder-coated finish, die-cast aluminum body
LENS ASSEMBLY	High-impact polycarbonate
MOUNTING	4 knockouts provided on each side of back box (right, left, top and bottom) for surface conduit mounting or mounting over 3" octagonal, 4" octagonal, or 4" square junction boxes

C-WP-C-TR-SCCT Series

LUMINAIRE AND ELECTRICAL PERFORMANCE

OPERATING TEMPERATURE RANGE	ESTIMATED L ₇₀ LIFETIME @ 25°C (77°F)	POWER FACTOR	TOTAL HARMONIC DISTORTION
w/out EM mode: -40°F to -104°F (-40°C to 40°C) w/ EM mode: 0°C to 40°C (32°F to 104°F)	> 50,000 Hours	> 0.9	<20%

SKU	REPLACES	LUMEN OUTPUT	BUG RATINGS*	SYSTEM WATTS	CURRENT DRAW (AMPS)			
					120V	208V	240V	277V
C-WP-C-TR-S6L-SCCT-UL-DB	150W PSMH	Up to 6500 Lumens	B1-U4-G3	46W	0.36	0.21	0.18	0.16
C-WP-C-TR-S10L-SCCT-UL-DB	250W PSMH	Up to 10,200 Lumens	B2-U4-G4	71W	0.57	0.33	0.28	0.25
C-WP-C-TR-S14L-SCCT-UL-DB	400W MH	Up to 14,400 Lumens	B2-U5-G5	100W	0.80	0.46	0.40	0.35

* For more information on the IES BUG (Backlight-Uplight-Glare) Rating visit: <https://www.ies.org/wp-content/uploads/2017/03/TM-15-11BUGRatingsAddendum.pdf>. Valid with no tilt.


WARRANTY AND CERTIFICATIONS

WARRANTY	cULus LISTED	DLC
5-Year Warranty*	Wet Listed	DLC Premium 5.1 *DLC Standard (S10L Series)

ACCESSORIES

	UNIVERSAL BUTTON PHOTOCELL (120V-277V)
	SKU: CCR-PHC-0306-GC USE: Photocell is field installed and drilling of the back box is required. 500W Max.
	UNIVERSAL BUTTON PHOTOCELL (120V-277V)
	SKU: JL-423CZ USE: Photocell is field installed and drilling of the back box is required. 1000W Max.

LOCATION OF SWITCHES

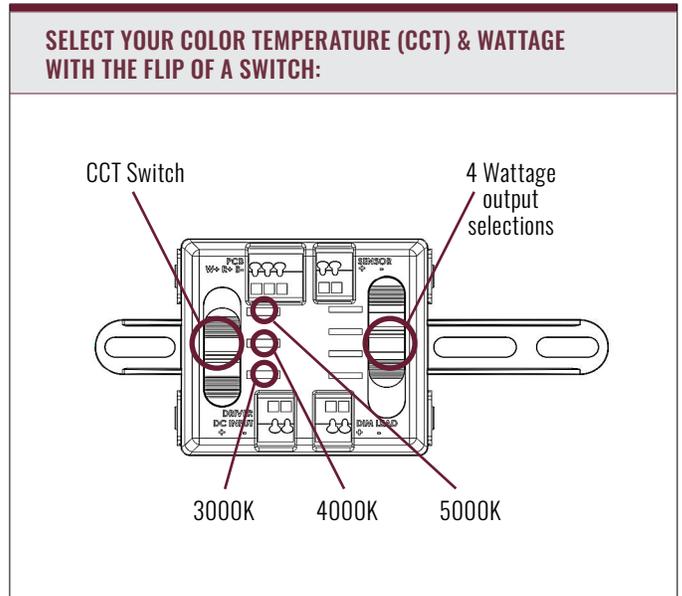

© 2022 Cree Lighting, A company of IDEAL INDUSTRIES. All rights reserved. For informational purposes only. Content is subject to change. Patent www.creelighting.com/patents. C-Lite and the C-Lite logo are registered trademarks of Cree Lighting. The cULus logo is a registered trademark of UL LLC. The DLC QPL logo and the DLC QPL Premium logo are registered trademarks of Northeast Efficiency Partnerships, Inc.

US: creelighting.com, e-conolight.com

Distribution/Sales: 855-617-2733 Customer Service: 888-243-9445

Rev. Date: V2 01/18/2022

For informational purposes only. Content is subject to change. *See lighting.cree.com/warranty for details

C-LITE
LED LIGHTING