

## C-WP-A-TWP Series

Traditional-Style LED Wall Pack w/ Glass Lens | Field Selectable CCT and Wattage

Replaces up to 400W MH

**C-LITE**  
LED LIGHTING



### THE WALL PACK THAT WORKS FOR YOU

Delivering up to 17,160 lumens, our cULus Listed C-Lite Traditional-Style LED Wall Packs let you toggle between 3 different color temperatures (3000K, 4000K, and 5000K) and 5 different wattage options per unit. It features a glass lens that won't yellow over time and is backed by our 5-year limited warranty.

### PRODUCT SPECIFICATIONS

#### OVERVIEW

- Initial Delivered Lumens: Wattage settings and their lumen outputs — **S14L**: 100W: 14,300 Lumens, 80W: 11,600 Lumens, 70W: 10,430 Lumens, 60W: 9,120 Lumens, 50W: 7,750 Lumens  
**S17L**: 120W: 17,160 Lumens, 110W: 15,730 Lumens, 100W: 14,500 Lumens, 80W: 12,000 Lumens, 70W: 10,710 Lumens
- CRI:  $\geq 80$
- CCT: Field Selectable (3000K/4000K/5000K)
- Max. Input Power: 100W (**S14L**), 120W (**S17L**)
- Operating Temperature Range: -40°F to 95°F (-40°C to 35°C)
- Estimated L70 Lifetime @ 25°C: > 100,000 hours
- Power Factor: > 0.9 at full load
- Total Harmonic Distortion: < 20% at full load
- Limited Warranty: 5-Year\*
- Replaces: 320W PSMH (**S14L**), 400W MH (**S17L**)

FEATURES	RECOMMENDED USE	INPUT VOLTAGE
<ul style="list-style-type: none"><li>Select your CCT with choices of 3000K, 4000K or 5000K</li><li>S14L wattage options: 100W, 80W, 70W, 60W or 50W</li><li>S17L wattage options: 120W, 110W, 100W, 80W, or 70W</li><li>Up to 143 LPW (Lumens Per Watt)</li><li>FCC Part 15, Subpart B, Class A limits for conducted and radiated emissions</li></ul>	<ul style="list-style-type: none"><li>Entryways</li><li>General Area Lighting</li><li>Perimeter Lighting</li><li>Storage Facilities</li></ul>	<ul style="list-style-type: none"><li>Universal (120V through 277V Operation)</li></ul>

#### CERTIFICATIONS:

 **CA RESIDENTS WARNING:** Cancer and Reproductive Harm –  
[www.p65warnings.ca.gov](http://www.p65warnings.ca.gov)




# C-WP-A-TWP Series

## ORDERING INFORMATION

Example SKU: C-WP-A-TWP-S14L-SCCT-UL-BZ

C-WP	A	TWP		SCCT	UL	BZ
PRODUCT	SERIES	STYLE	LUMEN PACKAGE	FIELD SELECTABLE CCT	VOLTAGE	HOUSING COLOR
C-WP	A	TWP Traditional-Style Wall Pack	<b>S14L</b> Up to 14,300 Lumens* <b>S17L</b> Up to 17,160 Lumens*	<b>SCCT</b> Warm White (3000K) Neutral White (4000K*) Cool White (5000K)	<b>UL</b> Universal 120-277V	<b>BZ</b> Medium Bronze

\*Default settings at time of shipping are highest product wattage and 4000K. Lumen multiplier for 3000K and 5000K is 0.95.

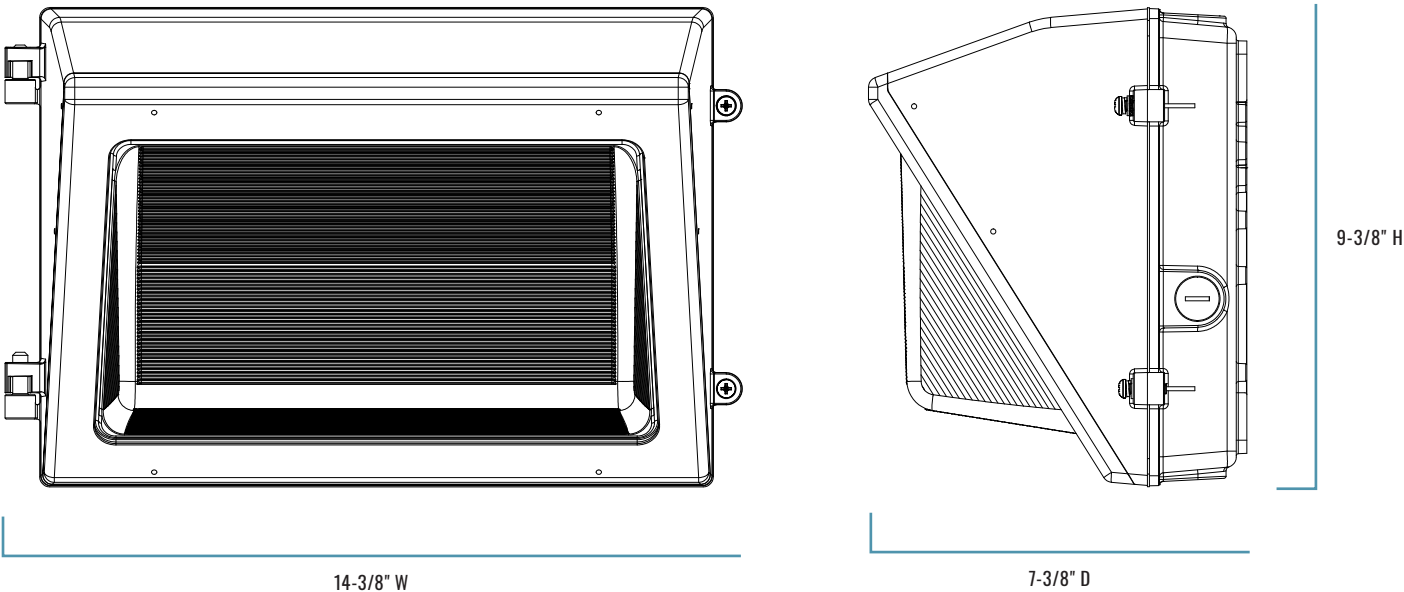

## SERIES OVERVIEW

DIMENSIONS	PRODUCT WEIGHT	MOUNTING HEIGHT	SPACING
14-3/8" W x 9-3/8" H x 7-3/8" D	8.5 lbs.	15-20 feet	2-3 times the mounting height

## FIXTURE SPECIFICATIONS

HOUSING	Die-cast aluminum powder coated in a medium bronze finish
LENS ASSEMBLY	Borosilicate glass lens
MOUNTING	Four 1/2" NPS tapped conduit knockouts for flexibility with mounting options

# C-WP-A-TWP Series

## LUMINAIRE AND ELECTRICAL PERFORMANCE

OPERATING TEMPERATURE RANGE	ESTIMATED L <sub>70</sub> LIFETIME @ 25°C (77°F)	POWER FACTOR	TOTAL HARMONIC DISTORTION	DIMMABLE
-40°F to 95°F (-40°C to 35°C)	> 100,000 Hours	> 0.9 at full load	≤20% at full load	No


SKU	REPLACES	DISTRIBUTION	LUMEN OUTPUT	BUG RATINGS*	SYSTEM WATTS	CURRENT DRAW (AMPS)			
						120V	208V	240V	277V
C-WP-A-TWP-S14L-SCCT-UL-BZ	320W PSMH	Type IV	13,575	3000K: B2-U4-G5	100W	0.78	0.8	0.8	0.81
			14,300	4000K: B2-U4-G5					
			13,575	5000K: B2-U4-G5					
C-WP-A-TWP-S17L-SCCT-UL-BZ	400W MH		16,300	3000K: B2-U5-G5	120W	0.91	0.92	0.926	0.93
			17,160	4000K: B2-U5-G5					
			16,300	5000K: B2-U5-G5					

\* For more information on the IES BUG (Backlight-Uplight-Glare) Rating visit: <https://www.ies.org/wp-content/uploads/2017/03/TM-15-11BUGRatingsAddendum.pdf>. Valid with no tilt.

## WARRANTY AND CERTIFICATIONS

WARRANTY	cULus LISTED	DLC
5-Year Limited*	Wet Locations	5.1 Premium

## ACCESSORIES

	UNIVERSAL BUTTON PHOTOCELL (120V-277V)
	SKU: <b>JL-423CZ</b> USE: Photocell is field installed and drilling of the back box is required. 1000W Max.

© 2023 Cree Lighting, A company of IDEAL INDUSTRIES. All rights reserved. For informational purposes only. Content is subject to change. Patent [www.creelighting.com/patents](http://www.creelighting.com/patents). C-Lite and the C-Lite logo are registered trademarks of Cree Lighting. The DLC QPL logo and the DLC QPL Premium logo are registered trademarks of Northeast Efficiency Partnerships, Inc. The cULus logo is a registered trademark of UL LLC.

US: [creelighting.com](http://creelighting.com), [e-conolight.com](http://e-conolight.com)

Distribution/Sales: 855-617-2733 Customer Service: 888-243-9445

Rev. Date: V2 01/26/2023

For informational purposes only. Content is subject to change. \*See [creelighting.com/resources/warranties](http://creelighting.com/resources/warranties)

**C-LITE**  
LED LIGHTING