

C-TR-C-FP22-SCCT Series

LED Field Selectable (Lumens and CCT) Flat Panel - 2' x 2'
Replaces up to 3 x F17T8

C-LITE
LED LIGHTING

MULTIPLE FIXTURES IN ONE

Our C-Lite Backlit LED Selectable Flat Panel with optional Emergency Backup delivers versatility and value. Featuring both field selectable lumen packages (3850 / 3040 / 2280) and CCT (3500K / 4000K / 5000K), our Flat Panel offers nine possible fixtures in a single box. Backed with a 5-year limited warranty, from a trusted brand.



PRODUCT SPECIFICATIONS

OVERVIEW

- Initial Delivered Lumens: Field Selectable (3850 / 3040 / 2280)
- CRI: ≥ 80
- CCT: Field Selectable Color Temp (3500K/4000K/5000K)
- Mounting: Recessed, Installs into conventional grid ceilings, optional surface mount or drywall grid adapter kit
- Input Power: (30W/24W/18W)
- Dimmable: 0-10 V Dimming to 10%
- Operating Temperature Range: -4°F to 104°F (-20°C to 40°C); minimum 32° F (0°C) (w/EB)
- Lifespan: Estimated L₇₀ Lifetime @ 25°C (77°F): > 100,000 hours
- Power Factor: > 0.9 at full load
- Total Harmonic Distortion: < 20 % at full load
- Limited Warranty: 5-Year*
- Replaces up to: 3 x F17T8
- UL Listed

FEATURES	BENEFITS	RECOMMENDED USE
<ul style="list-style-type: none">• FCC Part 15, Subpart B, Class A limits for conducted and radiated emissions• Field Selectable (Lumens and CCT)• Integrated PMMA Lens and polystyrene diffuser	<ul style="list-style-type: none">• IC Rated for direct contact with insulation• Fits in low-clearance drop ceilings• Fully tested and backed by Cree Lighting®	<ul style="list-style-type: none">• Offices• Educational & Retail• Commercial & Institutional

ORDERING INFORMATION

Example: C-TR-C-FP22-S37L-SCCT-UL-WH

C-TR	C	FP22	S37L	SCCT	UL	WH		
PRODUCT	SERIES	STYLE	FIELD SELECTABLE LUMEN PACKAGE	FIELD SELECTABLE CCT	VOLTAGE	HOUSING COLOR	EMERGENCY BACKUP OPTION	CASE PACK QTY
C-TR	C	FP22 Flat Panel 2' x 2'	S37L 3850 Lumens (30W)* 3040 Lumens (24W) 2280 Lumens (18W)	SCCT Selectable CCT (Color Temperature) 3500K 4000K* 5000K	UL Universal 120-277 V Operation	WH White	[blank] w/o Emergency Backup option EB Emergency Battery Backup (1500 lumens) - Provides 90 minutes of emergency operation	2 2-Pack - Not available with EB option

*Default settings at time of shipping are 3850 lumens and 4000K.

CERTIFICATIONS:

US: creelighting.com, e-conolight.com


Distribution/Sales: 855-617-2733 Customer Service: 888-243-9445

Rev. Date: 07/25/2022

For informational purposes only. Content is subject to change. *See creelighting.com/resources/warranties for details



C-TR-C-FP22-SCCT Series

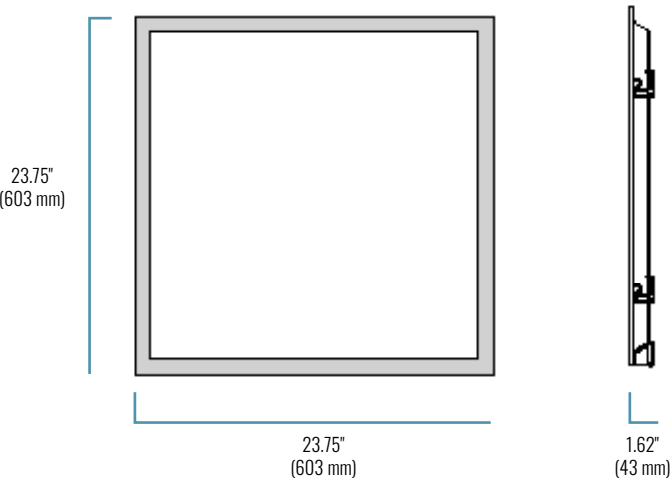

SERIES OVERVIEW

DIMENSIONS	PRODUCT WEIGHT	MOUNTING HEIGHT	SPACING
23.75" (603mm) L x 23.75" (603mm) W x 1.62" (43mm) H (without EB) 23.75" (603mm) L x 23.75" (603mm) W x 3.0" (76mm) H (w/EB)	5.29 lbs (without EB) 11.0 lbs (w/EB)	8 to 12 feet	8'x 8' – 10'x 10'

FIXTURE SPECIFICATIONS

HOUSING	Durable steel construction White Polyester Powder-Coat
LENS ASSEMBLY	Integrated PMMA Lens and polystyrene diffuser prevents hot spots, shadows and glare, while providing uniform illumination
MOUNTING	Recessed Installs into conventional grid ceilings Optional surface mount or drywall grid adapter kit

LUMINAIRE AND ELECTRICAL PERFORMANCE

OPERATING TEMPERATURE RANGE	ESTIMATED L ₇₀ LIFETIME @ 25°C (77°F)	POWER FACTOR	TOTAL HARMONIC DISTORTION	DIMMABLE
-4°F to 104°F (-20°C to 40°C); minimum 32° F (0°C) (w/EB)	> 100,000 Hours	> 0.9 at full load	< 20% at full load	0-10V Dimming to 10%

FIELD SELECTABLE LUMENS (35K/40K/50K)	SYSTEM WATTS (120-277V)	CURRENT DRAW (AMPS)			
		120V	208V	240V	277V
3850*	30W	0.25 A	0.14 A	0.13 A	0.11 A
3040	24W	0.20 A	0.12 A	0.10 A	0.09 A
2280	18W	0.15 A	0.09 A	0.08 A	0.06 A

*Default settings at time of shipping are 3850 lumens and 4000K.





C-TR-C-FP22-SCCT Series

WARRANTY & CERTIFICATIONS

WARRANTY	cULus LISTED	DLC
5-Year Limited*	Damp Locations. Designed for indoor use only.	DLC Premium v5.1

ACCESSORIES

	SURFACE MOUNT KIT
	SKU: C-ACC-PSMK22 USE: For use when surface mounting to ceilings ASSEMBLED DIMENSIONS: 24-3/16" L x 24-3/16" W x 2-1/2" H NOTE: For use with C-TR-C-FP series panels only. Not for use with EB units.
	DRYWALL GRID ADAPTER
	SKU: DGA22-WHT (single-pack) DGA22-WHT-10PK (10-pack) USE: For use when mounting in drywall ceilings

© 2022 Cree Lighting, A company of IDEAL INDUSTRIES. All rights reserved. For informational purposes only. Content is subject to change.
Patent www.creelighting.com/patents. C-Lite and the C-Lite logo are registered trademarks of Cree Lighting, A company of IDEAL INDUSTRIES. The cULus logo is a registered trademark of UL LLC. The DLC QPL, DLC QPL Premium and the DLC LUNA Logos are the registered and unregistered trademarks of Efficiency Forward, Inc.

US: creelighting.com, e-conolight.com

Distribution/Sales: 855-617-2733 Customer Service: 888-243-9445

Rev. Date: 07/25/2022

For informational purposes only. Content is subject to change. *See creelighting.com/resources/warranties for details

C-LITE
LED LIGHTING