

# C-WM-A-WDG Series

LED Gooseneck Light | Field Selectable Wattage

Replaces 100W PSMH



## DURABLE, EASY TO INSTALL & SELECTABLE WATTAGE

Add decorative appeal to an outdoor façade, patio or deck, storefront or other commercial building with our C-Lite LED Gooseneck Light. Choose from either an 11-inch or 14-inch straight or angled shroud. Easily mount to any wall, adjust the included arm to fit your needs, and enjoy up to 50,000 hours of maintenance free operation and efficient LED lighting. That's nearly 6 years of not having to get on a ladder to repair or replace a fixture. These gooseneck lights deliver either 4200 or 4500 lumens, are available in either 3000K or 5000K, and have field selectable wattage. It's cULus Listed for wet locations and backed by our amazing 5-year warranty.



## PRODUCT SPECIFICATIONS

### OVERVIEW

- Initial Delivered Lumens: 4200L or 4500L
- CRI:  $\geq 70$
- CCT: Warm White (3000K) or Cool White (5000K)
- Input Power: 36W/27W/17W
- Operating Temperature Range: -40°F to 104°F (-40°C to 40°C)
- Estimated  $L_{70}$  Lifetime @ 25°C: > 100,000 hours
- Power Factor:  $\geq 0.9$  at full load
- Total Harmonic Distortion: < 20% at full load
- Limited Warranty: 5 Years\*
- Replaces 100W PSMH

FEATURES	RECOMMENDED USE	INPUT VOLTAGE
<ul style="list-style-type: none"> <li>• FCC Part 15, Subpart B, Class A limits for conducted and radiated emissions</li> <li>• 17-1/2" arm to gain maximum light distribution</li> <li>• Shroud can be adjusted to many different angles to fit your needs</li> </ul>	<ul style="list-style-type: none"> <li>• Building Façades</li> <li>• Retail</li> <li>• Signs</li> <li>• Storefront</li> <li>• Outdoor Patios and Decks</li> </ul>	<ul style="list-style-type: none"> <li>• Universal (120V - 277V)</li> </ul>

### ORDERING INFORMATION

Example SKU: C-WM-A-WDG-S4L-3K-UL-BK-11IN-STR


C-WM	A	WDG	S4L		UL	BK		
PRODUCT	SERIES	STYLE	LUMEN PACKAGE	CCT	VOLTAGE	FINISH COLOR	SHROUD SIZE	SHROUD TYPE
C-WM	A	WDG Gooseneck	<b>S4L</b> 3000K: 4200L/3600L/2400L <b>S4L</b> 5000K: 4500L/3700L/2500L	<b>3K</b> Warm White (3000K) <b>5K</b> Cool White (5000K)	UL Universal (120V - 277V)	BK Black	<b>11IN</b> 11" Shroud <b>14IN</b> 14" Shroud	<b>STR</b> Straight Shroud <b>ANG</b> Angled Shroud

### CERTIFICATIONS:

CA RESIDENTS WARNING: Cancer and Reproductive Harm – [www.p65warnings.ca.gov](http://www.p65warnings.ca.gov)



# C-WM-A-WDG Series

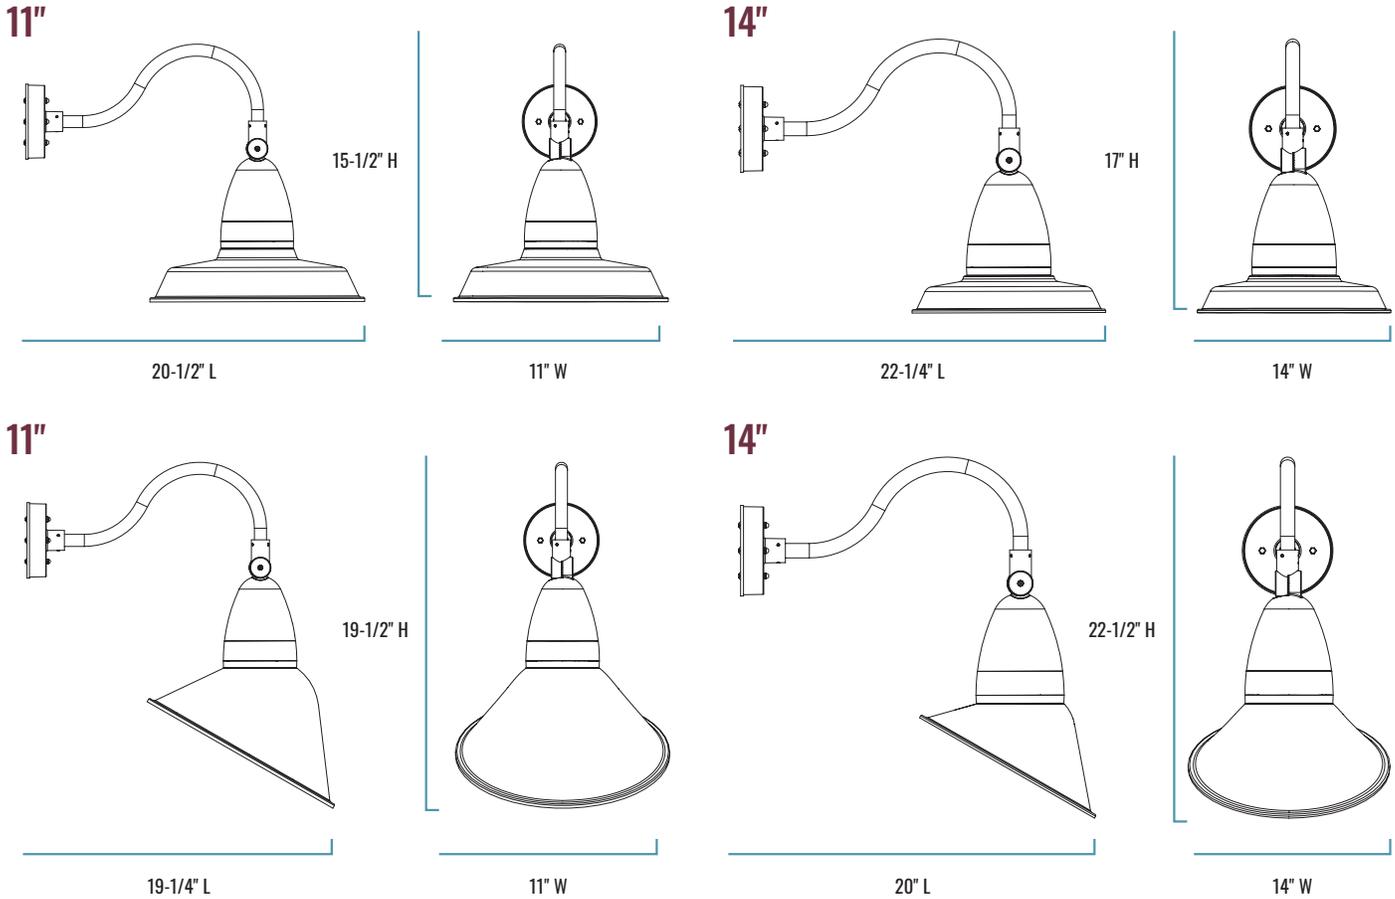

## SERIES OVERVIEW

DIMENSIONS (MOUNTING ARM INCLUDED IN VALUES)	PRODUCT WEIGHT	MOUNTING HEIGHT
<b>11IN-STRAIGHT SHROUD:</b> 20-1/2" L x 11" W x 15-1/2" H	5 lbs.	25 feet
<b>11IN-ANGLED SHROUD:</b> 19-1/4" L x 11" W x 19-1/2" H		
<b>14IN-STRAIGHT SHROUD:</b> 22-1/4 L x 14" W x 17" H		
<b>14IN-ANGLED SHROUD:</b> 20" L x 14" W x 22-1/2" H		

## FIXTURE SPECIFICATIONS

<b>HOUSING</b>	Powder coated black, durable die-cast aluminum housing and aluminum shroud
<b>LENS ASSEMBLY</b>	Tempered glass
<b>MOUNTING</b>	Direct mount; includes mounting plate, fits over 4-inch square or octagonal junction box and secures with four acorn nuts

# C-WM-A-WDG Series

## LUMINAIRE AND ELECTRICAL PERFORMANCE

OPERATING TEMPERATURE RANGE	ESTIMATED L <sub>70</sub> LIFETIME @ 25°C (77°F)	POWER FACTOR	TOTAL HARMONIC DISTORTION	DIMMABLE
-40°F to 104°F (-40°C to 40°C)	> 100,000 Hours	≥ 0.9 at full load	< 20 % at full load	No

SKU	REPLACES	LUMEN OUTPUT	SYSTEM WATTS	CURRENT DRAW (AMPS)			
				120V	208V	240V	277V
C-WM-A-WDG-S4L-3K-UL-BK-11IN-STR	100W PSMH	4200	36W/27W/17W	0.32	0.19	0.16	0.14
C-WM-A-WDG-S4L-5K-UL-BK-11IN-STR		4500					
C-WM-A-WDG-S4L-3K-UL-BK-11IN-ANG		4200					
C-WM-A-WDG-S4L-5K-UL-BK-11IN-ANG		4500					
C-WM-A-WDG-S4L-3K-UL-BK-14IN-STR		4200					
C-WM-A-WDG-S4L-5K-UL-BK-14IN-STR		4500					
C-WM-A-WDG-S4L-3K-UL-BK-14IN-ANG		4200					
C-WM-A-WDG-S4L-5K-UL-BK-14IN-ANG		4500					

## LUMEN INFORMATION

WATTS	LUMEN OUTPUT (3000K)	LUMEN OUTPUT (5000K)
36W	4200L	4500L
27W	3600L	3700L
17W	2400L	2500L

## WARRANTY AND CERTIFICATIONS

WARRANTY	cULus LISTED	DLC
5 Year Limited*	Wet Location	—

© 2023 Cree Lighting, A company of IDEAL INDUSTRIES. All rights reserved. For informational purposes only. Content is subject to change. Patent [www.creelighting.com/patents](http://www.creelighting.com/patents). C-Lite and the C-Lite logo are registered trademarks of Cree Lighting. The UL logo is a registered trademark of UL LLC.

US: [creelighting.com](http://creelighting.com), [e-conolight.com](http://e-conolight.com)

Distribution/Sales: 855-617-2733 Customer Service: 888-243-9445

Rev. Date: 02/23/2023

For informational purposes only. Content is subject to change. \*See [creelighting.com/resources/warranties](http://creelighting.com/resources/warranties)

**C-LITE**  
LED LIGHTING